

Ultra-rugged, High-Power, Wide Band - Frequency

The HMS-ATTR-7.5K is a very rugged, high power, underwater transducer specifically designed for marine sub-bottom profilers and echo-sounders in the 2kHz to 20kHz frequency range. The transducer is designed for operation in a variety of array configurations to support shallow water surveys to 6000m deep Subbottom, voice and data communications, altitude and ranging applications for submersible, AUV and ROV platforms. Vessel installations will vary based on the operational requirements and vessel configuration so please contact Falmouth Scientific with your specific needs. Single transducers can support a 600W power level at a 30% duty cycle or 200W continuous while when configured as arrays the power levels for the array can be several Kilowatts though this will be cavitation limited depending on the installation.




The HMS-ATTR-7.5K transducer is a tonpizl piston source approximately 1/2 wavelength in diameter at the center of its operating frequency range and is designed with an industry standard mounting hole pattern through a standard diameter flange mount which allows support for both new and existing vehicle configurations. The transducers can be arranged in a multi-element array to support a wide variety of beam patterns and source level to suite most survey applications.



CHARACTERISTICS

Power Rating	600 Watts 30% duty cycle, 200 Watts CW
Transmitting Response per Volt	152 dB re 1uPa/1V@1m
Receiving Response per Volt	-165 dB re 1uPa/1V@1m
Nominal Impedance	250 ohms @ 7.5KHz
Directivity	80 0 conical at -3 dB
Maximum Operating Depth	6000m
Weight (approximate)	25 lbs



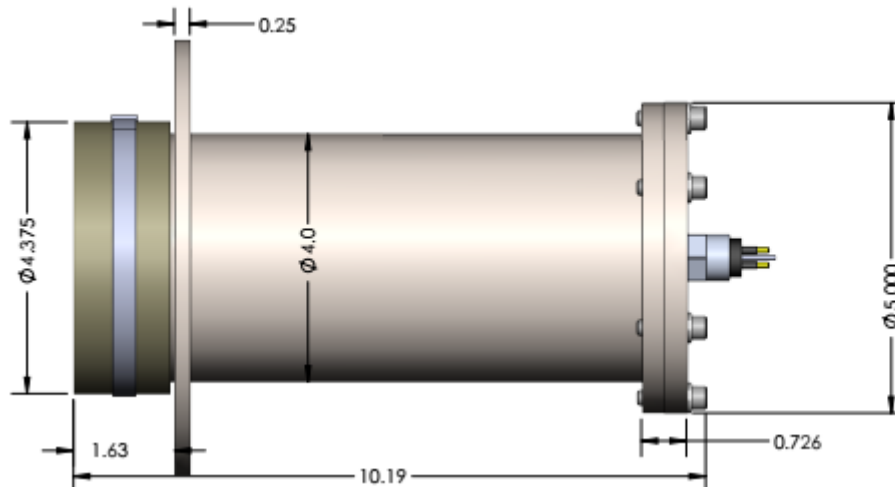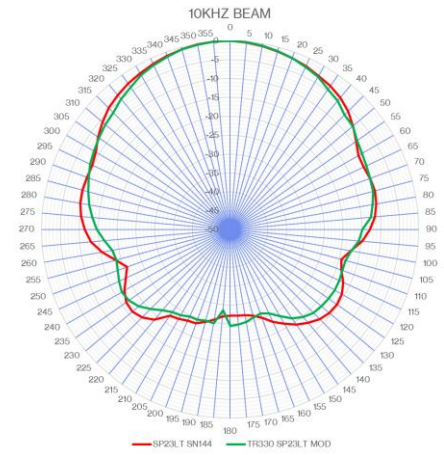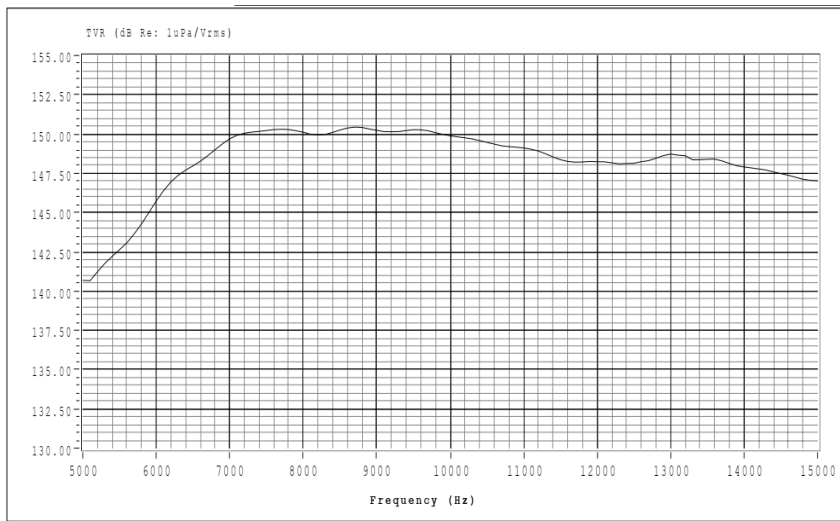

March 2024
 Specification Subject to Change Without Notice

